


**KARTA
2560**

**ŁĄCZNIK PRZEDŁUŻAJĄCY
JEDNOWIDLASTY ZE
SWORZNIEM ŚRUBOWYM**

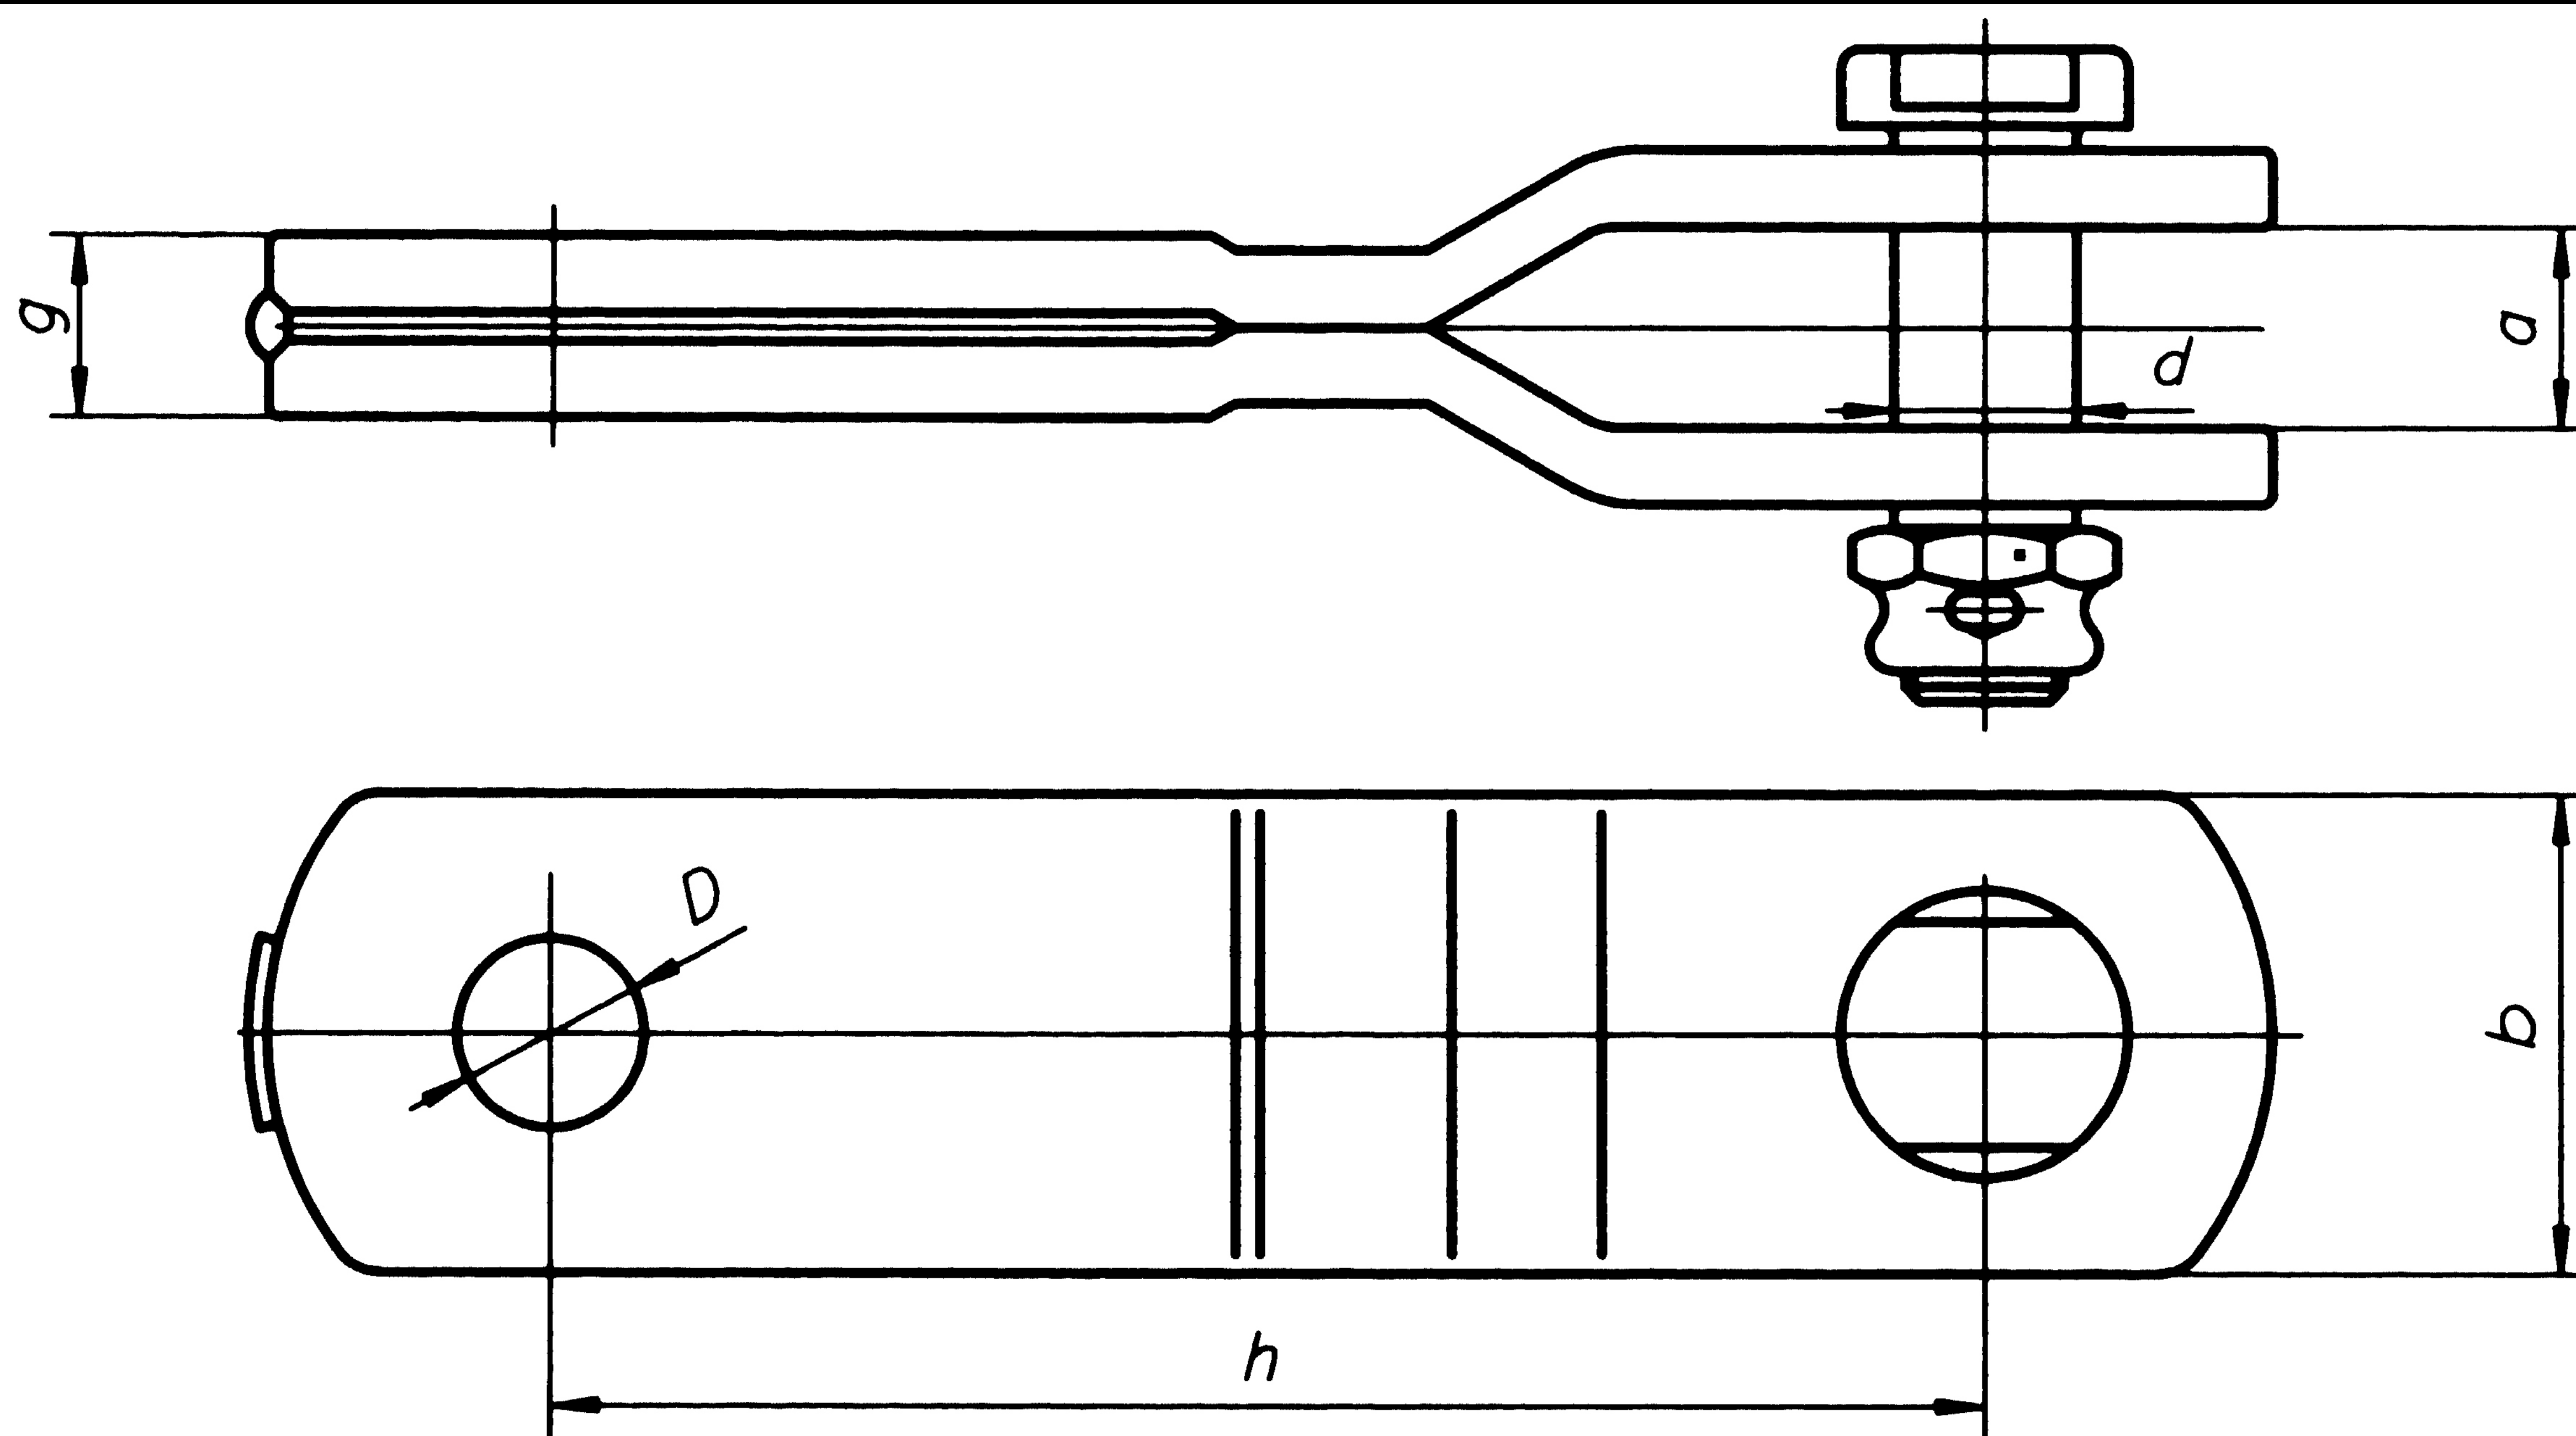

Wyróżnik oznaczenia		Wymiary [mm]						Obciążenie niszczące [kN]	Obciążeni e prądowe [kA]	Masa [kg]
ZEMEX	HANDLOWY	h	d	D	g	a	b			
2560-150/27	3837/S	150	19	27	19	22	50	120	25	1,40
2560-150/23	38480	150	22	23	19	22	50	180	40	1,45
2560-100/21,5	10503/100	100	19	21,5	19	22	50	120	25	1,13
2560-110/21,5	10503/110	110	19	21,5	19	22	50	120	25	1,20
2560-120/21,5	10503/120	120	19	21,5	19	22	50	120	25	1,25
2560-150/21,5	10503/150	150	19	21,5	19	22	50	120	25	1,43
2560-200/21,5	10503/200	200	19	21,5	19	22	50	120	25	1,74
2560-235/21,5	10503/235	235	19	21,5	19	22	50	120	25	1,94
2560-300/21,5	10503/300	300	19	21,5	19	22	50	120	25	2,36
2560-400/21,5	10503/400	400	19	21,5	19	22	50	120	25	2,98
2560-100/20	10103/100	100	19	20	19	22	50	240	38	1,09
2560-125/20	10103/125	125	19	20	19	22	50	240	38	1,24
2560-150/20	10103/150	150	19	20	19	22	50	240	38	1,39
2560-200/20	10103/200	200	19	20	19	22	50	240	38	1,69
2560-250/20	10103/250	250	19	20	19	22	50	240	38	1,99

Materiał: stal cynkowana ogniowo

Zastosowanie: Do budowy łańcuchów izolatorów w liniach napowietrznych.

PKWiU 31.20.40-90.40

WPPUH „ZEMEX” Sp. Z o.o., 63-100 ŚREM, ul. Podwale 1 , tel. 612830693